


# %; ' ; ü & - è |

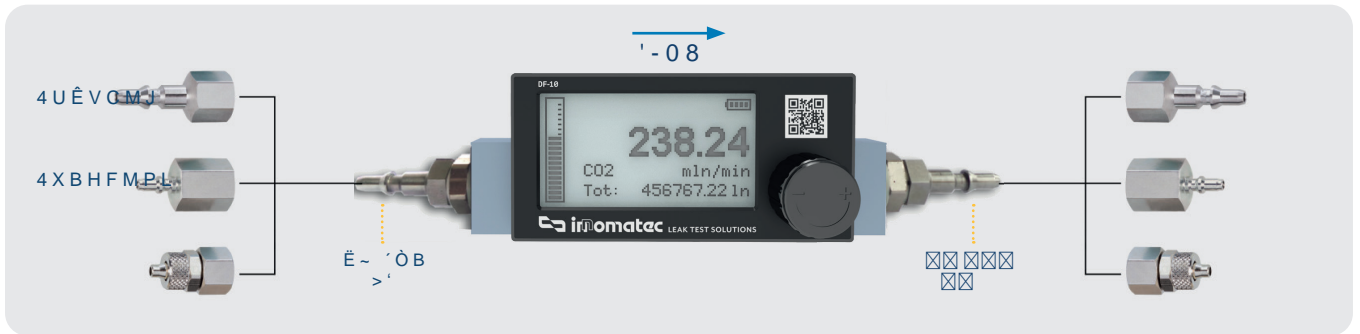


## š Á , z

- 100% accuracy (±0.1%)
- 32-bit resolution
- CTS innomatec leak detector
- 32-bit resolution
- Operating pressure: -0.8 ~ 10bar
- Sensitivity:  $1 \times 10^{-6}$  mbar l/s He
- Dimensions: 56 x 28mm
- Weight: 0.4kg
- Micro-USB interface
- Operating temperature: 0-50°C
- Humidity: 0-95% RH

## □ □

- Leak detection
- Leak rate measurement
- Leak location (leak rate, leak rate, leak rate)

## 적용 사례

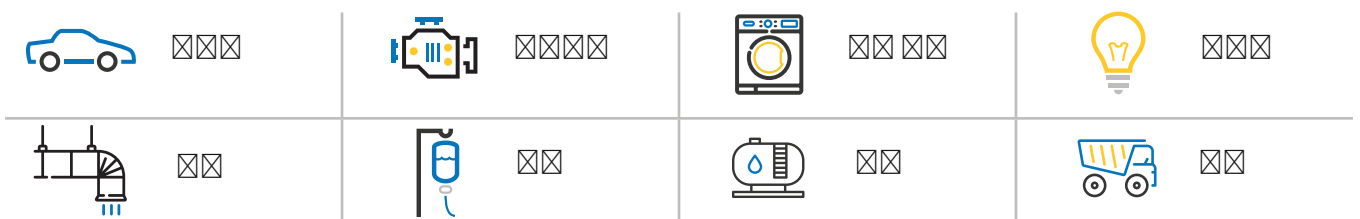

± , ú

- 100% accuracy
- 32-bit resolution
- CTS innomatec
- 32-bit resolution
- Operating pressure: -0.8 ~ 10bar
- Sensitivity:  $1 \times 10^{-6}$  mbar l/s He
- Dimensions: 56 x 28mm
- Weight: 0.4kg
- Micro-USB interface
- Operating temperature: 0-50°C
- Humidity: 0-95% RH

## □ □ □ □

□ □ (WxHxD)	114 x 43.3 x 67.8mm
□ □	0.4kg
□ □ □ □	AA □ □ □ □ Mirco-USB(□ □ □ □)
□ □ / □ □ □ □	IP50
□ □ □ □ □ □	Air, N2
□ □ □ □ □ □	0-50°C
□ □	0-95% RH, non-condensing

## DF-10 □ □

	DF-10/50	DF-10/500
□ □ □ □	0.6-50cc/□	6-500cc/□
□ □ □ □	□ 1.0% o□ □ □ □ □ scale	, P G G V M M T D B M F